

Safety Relief Valve HON 832



PRODUCT INFORMATION

**Serving the Gas Industry
Worldwide**

Honeywell

SAFETY RELIEF VALVE HON 832

Application, characteristics, technical data

Application

- As leak gas SRV with internal vent connection (function class B in accordance with DIN 33821)
- Variant as proportional SRV with autonomous vent connection (function class A in accordance with DIN 33821)
- For systems in municipal applications and industrial operations
- Leak gas SRV type “B”, e. g. for blowing off gas leakages downstream of gas pressure regulators to prevent the SSV from tripping by accident in the event of gas pressure regulator leaks due to consumer zero droop
- Can be used for gases in accordance with DVGW Worksheet G 260 and neutral, non-aggressive gases; other gases on request

Characteristics

- Simple, compact design
- Position-independent installation
- Safe operation
- High actuating accuracy
- Integrated vent line for use as leak gas SRV (type “B“)

Device-specific operating instructions, maintenance instructions, spare parts drawings, and spare parts lists are provided in the brochure “Operating and Maintenance Manual/ Spare Parts List 832.20”.


TECHNICAL DATA						
Max. permissible pressure PS		100 bar				
Max. operating pressure p _{max}		100 bar				
Specific pressure range W _{US} and accuracy class AC		Setpoint spring			Specific pressure range W _{US} in bar	Accuracy class AC
		No.	Colour	Wire Ø		
		1	grey	5	0.5 to 2	5/2.5
		2	yellow	5.6	1 to 4	2.5/1
		3	brown	6.3	2 to 8	2.5/1
		4	red	7	4 to 16	2.5/1
5	green	□8/7*	12 to 30	2.5/1		
Valve seat diameter		8 mm				
Valve flow rate coefficient KG:		32 m ³ /(h · bar)				
Connection		Pipe connections according to DIN EN ISO 8434-1 (DIN 2353), PN 100 for pipe outer diameters: Inlet: 12 mm Outlet: 16 mm, 20 mm, 25 mm, 28 mm				
Spring compartment venting		<ul style="list-style-type: none"> - Leak gas SRV type "B" - Proportional SRV type "A" Internal via vent line Autonomous vent connection with pipe outer diameter 12 mm				
Material		Main valve body Aluminium alloy Spring housing Aluminium alloy Measuring diaphragm NBR (Perbunan) Valve trim FKM				
Weight		Approx. 3 kg				
Temperature range		-20 °C to +60 °C				
CE mark in accordance with PED						
Function and strength		In accordance with DIN 33821				
ATEX		The mechanical components of the device do not have any potential ignition sources, and thus are not subject to ATEX 95 (94/9/EC). Electronic components attached on the device satisfy the ATEX requirements.				

*) □ = vertical cross section

SAFETY RELIEF VALVE HON 832

Dimensions

Dimensions

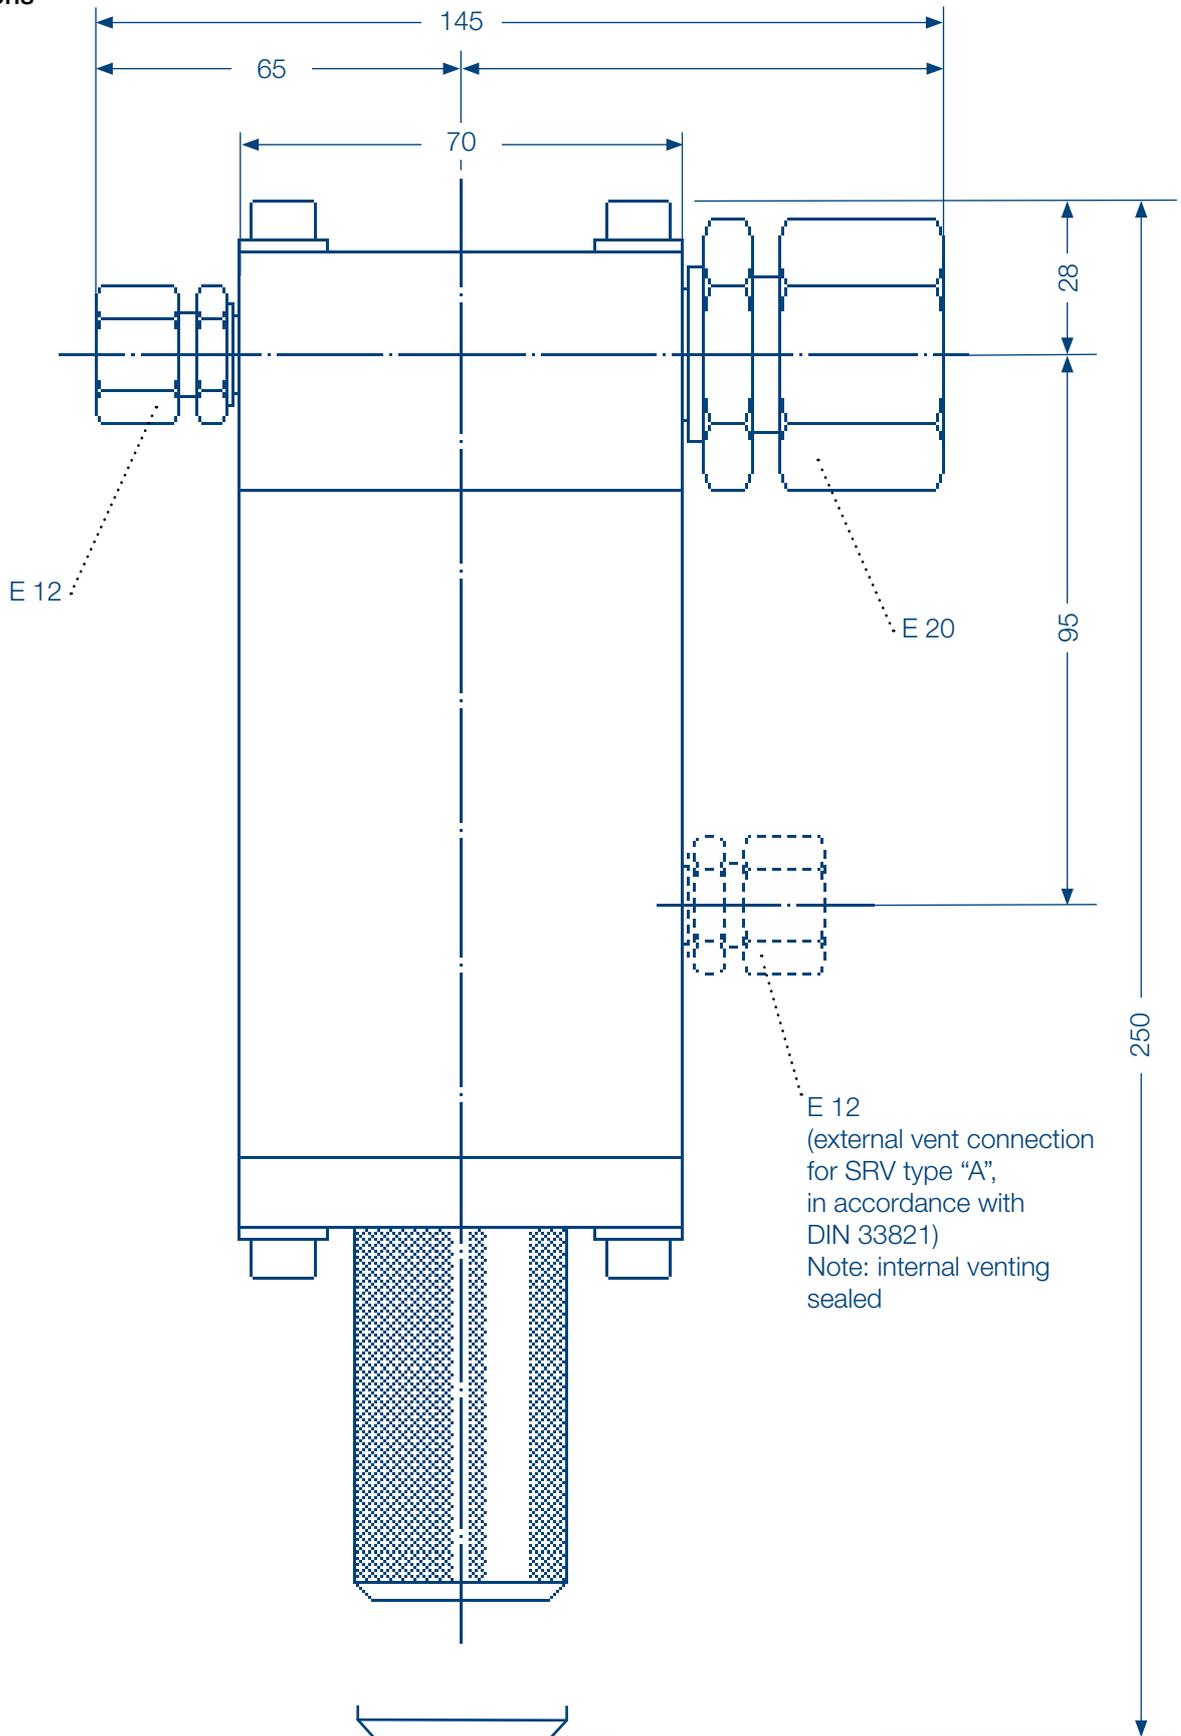

A safety relief valve (SRV) has the task of autonomously releasing a gas flow from a pressurised line, as soon as the pressure in the system to be safeguarded reaches the set response pressure through increasing increments. The SRV closes again when the pressure in the system to be safeguarded drops below the closing pressure.

The Safety relief valve HON 832 is a directly acting device (works without auxiliary energy) with spring loading.

The safety device is designed in two variants: as leak gas SRV and as proportional SRV.

When the device is used as a leak gas SRV (type "B" in accordance with 33821) the spring space is vented internally via the vent line. When the device is used as a proportional SRV (type "A" in accordance with DIN 33821) on the spring housing a connection piece is arranged for the autonomous vent line to the free atmosphere.

The pressure to be monitored on the inlet side (actual value) is switched internally and compared with the specified force of the adjustable setpoint spring. If the pressure in the system to be safeguarded exceeds the set response pressure, the main valve opens and allows the excess gas to flow off via the outlet line. The safety relief valve closes again automatically when the pressure of the system to be safeguarded drops below the response pressure of the SRV.

The lateral forces that occur due to the setpoint spring are dissipated directly to the housing via the guide bush. This ensures a high reproducible response accuracy.


The valve piston of the main valve is force-relieved through a control spring. Through this measure the valve trim is protected against impermissible stress. The measuring diaphragm is formed as a bead-moulded diaphragm. This means that the high actuating accuracy of the device is also ensured at lower operating temperatures.

SAFETY RELIEF VALVE HON 832

Structure and mode of operation

Leak gas quantity SRV (type "B" in accordance with DIN 33821)


6

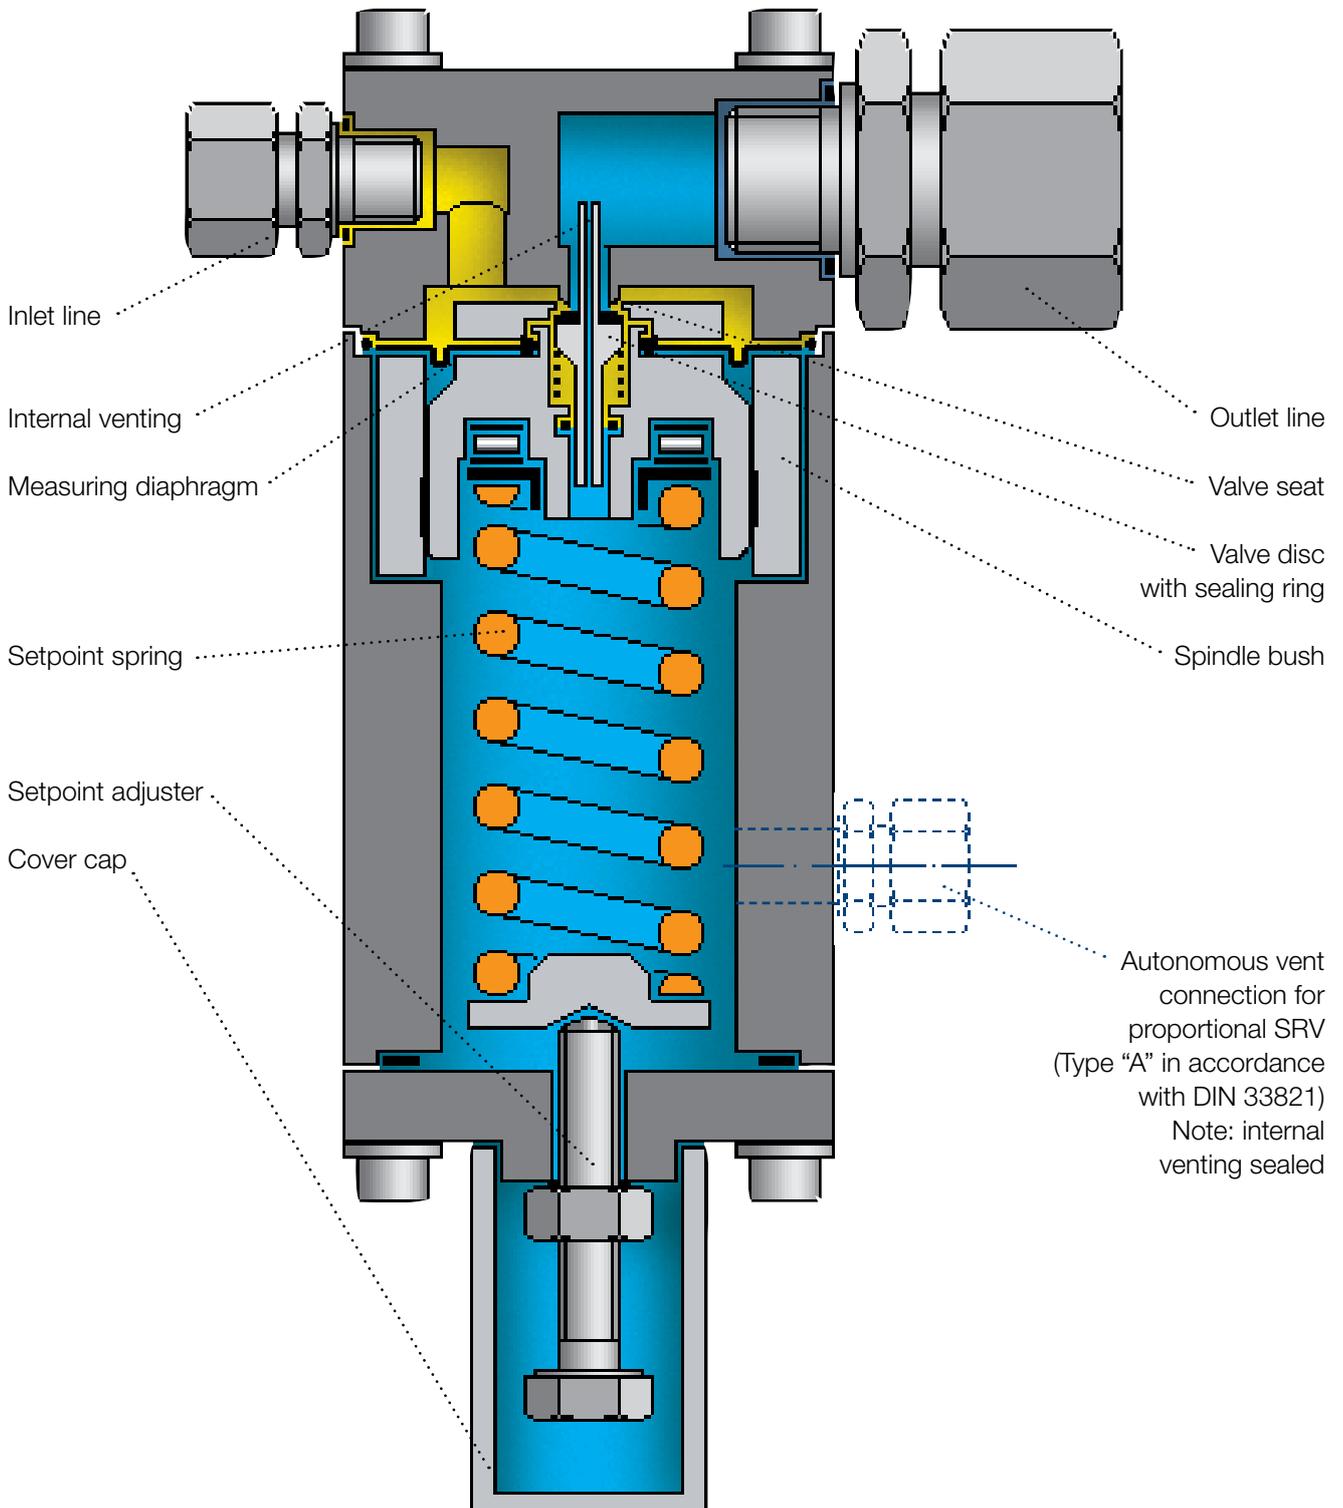

Device description (example)

HON 832 - B - E12 / E20 - 1

DEVICE DESIGNATION	
Type	
	HON 832
Function class	
Leak gas SRV (type "B" in accordance with DIN 33821)	B
Connection, inlet	
	E12
Connection, outlet	
	E16 E20 E25 E28
Specific pressure range W_{US} in bar	Spring no.
0.5 to 2	1
1 to 4	2
2 to 8	3
4 to 16	4
12 to 30	5

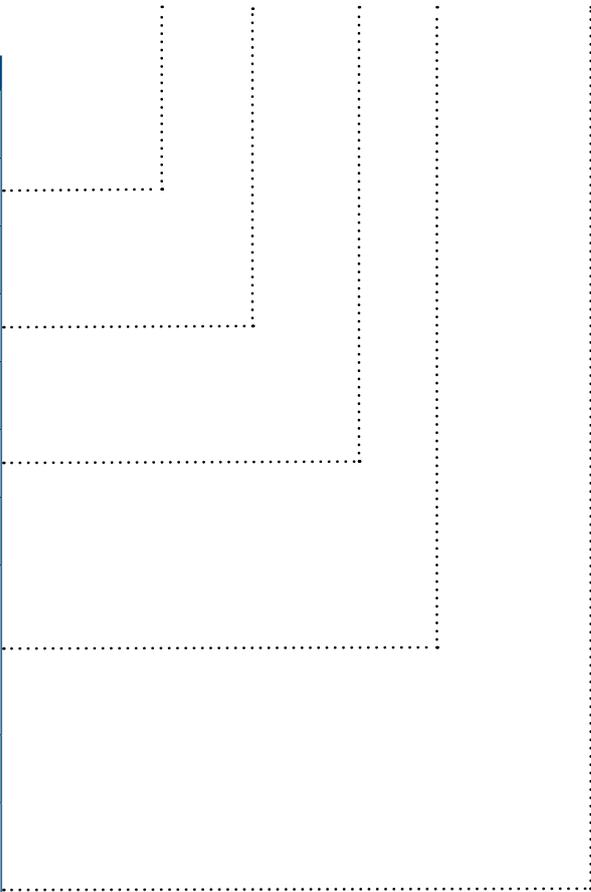

*Optionally with internal and external vent connection



Honeywell

AUTHORIZED DISTRIBUTOR

De Gidts & Feldman BV
The Netherlands
www.dgfg.nl



De Gidts & Feldman

INSTRUMENTATION & FILTRATION

For More Information

To learn more about Honeywell's
Advanced Gas Solutions, visit
www.honeywellprocess.com or contact
your Honeywell account manager

GERMANY

Honeywell Process Solutions

Honeywell Gas Technologies GmbH
Osterholzstrasse 45
34123 Kassel, Deutschland
Tel: +49 (0)561 5007-0
Fax: +49 (0)561 5007-107

HON 832.00
2017-01
© 2017 Honeywell International Inc.

Honeywell