


# Gas Pressure Regulator Series 240



## PRODUCT INFORMATION

**Serving the Gas Industry  
Worldwide**

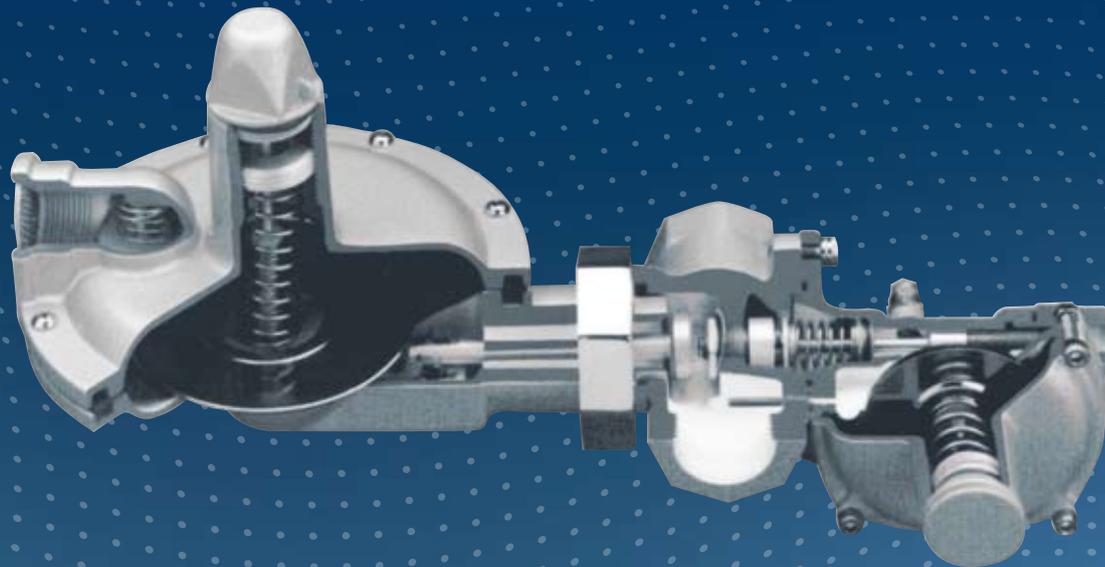

## GAS PRESSURE REGULATOR SERIES 240

Introduction, Application, Features, Technical Data

### Introduction

- The Series 240 is a direct acting single diaphragm, spring loaded open, lever operated regulator for use on gas pressure reduction systems.
- Control of varying inlet pressure and capacity applications is ensured by utilising a range of interchangeable orifices of varying size.
- Use with confidence on natural and manufactured gases of non-aggressive nature, including Nitrogen, Carbon Dioxide, Propane and Butane.

### Application

- Designed for use on gas pressure reduction services to domestic, business premises and small industrial feeds to burners, heater units, boilers and other items of equipment where an accurate, safe and dependable pressure controlled supply is required.

### Size Range

3/4" & 1" Screwed to BS.21 Rc.

### Installation

The regulator may be mounted in any orientation to suit site conditions, moisture or debris must not ingress the vent hole. For optimum performance the recommended operating position is with diaphragm casing horizontal and spring housing pointing vertically upwards.

It is important when installing equipment that pipeline stresses are kept to a minimum and no undue external forces are placed on the connections.

SERVICE CONDITIONS	
Maximum Inlet Pressure (dependent upon orifice size fitted)	Up to 10.3 barg (150psig)
Outlet Pressure Range: Series 240	10 to 210 mbar (4" to 84" wg)
Series 240 PH	70 mbarg to 350 mbarg (28" to 140" wg)
Internal Relief Valve Setting	20 mbarg (8" wg) (above regulator outlet pressure set point)
Temperature Range	-20°C to +60°C

### Features

- Completely independent operation of regulator and safety cut-off valve.
- Diaphragm casing can be rotated through 360° relative to regulator body and can be positioned at any angle to assist servicing and installation in confined spaces.
- Both regulator casing/valve head and safety cut-off valve can be removed from the body as cartridges, ensuring straightforward maintenance without removing the body from the pipeline.
- Wide operational pressure range
- Regulator can be fitted with Over pressure (OPCO) or Under/Over (UPCO/OPCO) pressure safety cut-off valve. These devices protect the downstream system in the event that a dangerous gas pressure condition develops.

REGULATOR RANGE					
Option	Description	240P	240LR	240R	240PH
P	No Internal Relief	•			
LR	With Limited Internal Relief		•		
R	With Internal Relief			•	
S.309LP - OPCO	Series 309LP Over Pressure Cut-Off Valve (OPCO)	•	•	•	•
S.309LP UPCO/OPCO	Series 309LP Combined Under/Over Pressure Safety Cut-Off Valve	•	•	•	•
PH	High outlet pressure model, no internal relief				•
K-ECL	Monitor with external control line (ECL)	•			

## GAS PRESSURE REGULATOR SERIES 240

Spring Selection, Materials of Construction

REGULATOR SPRING RANGES (SERIES 240)			
Spring		Outlet Pressure Range	
Number	Colour	mbar g	ins wg
126*	Red	10 - 20	4 - 6
131*	Self	15 - 35	6 - 14
127	Green	25 - 43	10 - 17
128	Orange	38 - 67	15 - 26
392	White	40 - 75	16 - 30
393	Blue	70 - 140	28 - 56
394	Grey	140 - 210	28 - 84

REGULATOR SPRING RANGES (SERIES 240PH)			
Spring		Cut-Off Range	
Number	Colour	mbar g	ins wg
394	Grey	70 - 210	28 - 84
1166	Yellow	140 - 350	56 - 140

ORIFICE SELECTION	
Orifice Size	Maximum Inlet Pressure
mm	bar
2.5	10.3
3.5	8.6
5.0	6.0
6.3	6.0
7.0	3.0
9.0	2.5 / 2.0*
12.5	1.5 / 1.0*

\* Use lower pressure when using spring no's 126 & 131

S.309LP-OPCO SAFETY CUT-OFF VALVE			
Spring		Cut-Off Range	
Number	Colour	mbar g	ins wg
861	Brown	35 - 90	14 - 36
1103	Gold	80 - 130	32 - 52
1104	Purple	120 - 250	48 - 100
1105	Black	200 - 350*	80 - 140

\*Maximum Over pressure set point: 260mbar (104" wg) on S.240 regulator

S.309LP UPCO/OPCO SAFETY CUT-OFF VALVE				
	Spring		Cut-Off Range	
	Number	Colour	mbar g	ins wg
OPCO	1109	Grey	40 - 55	16 - 22
	1110	Green	50 - 110	20 - 44
	1111	Silver	110 - 200	44 - 80
	1104	Silver/Red	150 - 240	60 - 96
UPCO	1138	Blue/Green	10 - 30	4 - 12

### Minimum differential between regulator outlet and safety cut-off pressure:

- P-Type: 35 mbar (14" wg) or 10% above regulator set point, whichever is the higher
- R/LR - Type: 55 mbar (22" wg) when internal relief fitted
- When UPCO/OPCO is fitted then minimum differential for P-Type is 45 mbar (18" wg) and 65 mbar (26" wg) for R/LR-Type (with internal relief)

## MATERIALS OF CONSTRUCTION

Regulator	
Body & body cover	Ductile iron to BS EN 1563 Grade EN-GJS-400-18
Lower/Upper diaphragm casing & spring housing	Aluminium Alloy: BS.1490
Diaphragm carrier and vent plate	Nylon 11
Vent pin, spring and gauze ring	Stainless Steel: BS.970
Orifice	Brass: BS.249
Valve seat & 'O' rings	Nitrile
Diaphragm	Nitrile
Valve head, stem, spring adjuster and cap	Aluminium: BS. 1476
Lever, pins, diaphragm plate and spindle	Carbon Steel: BS.4360 (Anti-corrosion plated)
S.309LP UPCO/OPCO Safety Cut-Off Valve	
Body	Aluminium: BS.1490 LM6
Spindle	Stainless Steel: BS.970 Grade 316 S31
Valve	Aluminium: BS.1474 Grade 6082TF
Valve Seating	Polyurethane: BS.1449 CS4
Diaphragm & 'O' rings	Nitrile
Spring Adjuster	Brass: BS.249 Grade CZ 121
Spring	Spring Carbon Steel: BS.5216 Grade HS3

## GAS PRESSURE REGULATOR SERIES 240

Capacities in SCMh for Natural Gas (SG: 0.6)


CAPACITIES								
Spring No. and Outlet Pressure	Inlet Pressure		Orifice Size - Millimetres					
	mbar	2.5	3.5	5	6.3	7	9	12.5
SPRING No. 126 <b>10-20 mbar</b>  SET TO <b>15 mbar</b>  DROOP <b>2.5 mbar</b>	20				2.4	2.5	2.8	4.1
	25			1.9	2.5	2.7	3.4	4.8
	45			2.5	3.4	4.0	4.6	6.4
	69	1.2	2.4	3.7	5.1	5.5	6.5	8.7
	207	1.8	4.4	6.0	6.7	8.9	11.3	21.7
	345	3.0	5.8	8.8	12.2	14.4	17.5	31.9
	690	6.2	9.8	15.8	22.9	24.2	35.4	51.0
	1 bar	7.8	13.8	19.1	25.5	30.4	41.0	
	1.5	10.4	19.5	38.2	51.0	51.0	51.0	
	2.0	12.6	26.4	44.6	51.0	51.0	51.0	
	2.5	15.0	31.0	46.7	51.0	51.0		
	3.0	17.0	34.7	51.0	51.0	51.0		
	4.0	20.8	37.4	51.0	51.0			
	6.0	29.7	38.3	51.0	51.0			
	7.0	35.7	40.2					
8.0	41.0	46.0						
8.6	46.7	46.0						
10	46.7							
SPRING No. 131 <b>15-35 mbar</b>  SET TO <b>25 mbar</b>  DROOP <b>3.7 mbar</b>	45			2.2	2.8	3.0	4.0	5.4
	69	1.5	2.4	3.1	4.1	5.0	5.7	8.3
	210	2.5	4.2	6.1	6.4	9.0	10.9	17.8
	345	4.3	6.4	8.3	11.5	14.3	16.9	26.8
	690	6.2	8.6	15.3	21.7	22.1	31.3	48.4
	1 bar	8.4	12.4	18.9	25.5	30.1	40.2	
	1.5	10.8	19.0	36.8	51.0	51.0	51.0	
2 - 10 BAR CAPACITIES IDENTICAL TO THOSE FOR SPRING NO 126 GIVEN ABOVE								
SPRING No. 127 <b>25-43 mbar</b>  SET TO <b>37.5 mbar</b>  DROOP <b>5.6 mbar</b>	45				2.2	2.4	3.0	4.2
	69			2.8	3.8	4.4	5.2	7.6
	210	2.4	5.5	6.1	6.4	8.4	10.9	17.8
	345	4.2	6.9	8.3	11.5	13.4	16.7	26.8
	690	6.9	10.4	15.3	21.7	26.5	36.5	48.4
	1 bar	8.4	14.6	18.9	25.5	37.1	43.8	
	1.5	10.6	20.1	36.8	51.0	51.0	51.0	
2 - 10 BAR CAPACITIES IDENTICAL TO THOSE FOR SPRING NO 126 GIVEN ABOVE								
SPRING No. 392 <b>40-75 mbar</b>  SET TO <b>60 mbar</b>  DROOP <b>9.5 mbar</b>	69	1.2	1.7	2.0	3.8	4.0	5.2	6.9
	210	2.4	3.2	3.7	6.2	6.6	9.7	15.1
	345	3.4	4.8	5.6	10.1	12.7	14.0	22.4
	690	6.6	8.5	9.6	15.2	17.7	24.1	41.9
	1 bar	9.1	11.7	15.9	19.3	26.7	36.4	54.7
	1.5	11.1	15.0	29.7	37.1	42.1	47.6	
	2.0	14.0	19.5	35.7	44.3	50.4	73.6	
	2.5	15.6	23.5	43.2	51.5	65.1	73.6	
	3.0	18.6	25.6	44.7	58.6	73.6		
	4.0	20.4	32.6	46.8	58.6			
	6.0	32.3	59.5	65.1	58.6			
	7.0	43.2	65.1					
	8.0	48.7	65.1					
8.6	52.4	65.1						
10	52.4							
SPRING No. 393 <b>70-140 mbar</b>  SET TO <b>105 mbar</b>  DROOP <b>16 mbar</b>	210	1.0	3.3	4.1	7.4	7.8	10.0	15.0
	345	2.5	6.2	7.0	12.0	12.3	14.6	23.9
	690	5.1	9.8	12.9	16.3	17.7	29.2	40.3
	1 bar	6.6	13.3	17.3	20.3	23.2	36.2	53.8
	1.5	9.1	18.3	24.9	29.4	35.0	48.5	
	2.0	10.9	22.5	34.7	40.1	40.7	60.5	
	2.5	13.2	27.4	42.9	47.4	48.8	73.6	
	3.0	14.9	30.6	44.7	55.2	57.2		
	4.0	18.3	37.4	44.9	55.2			
	6.0	26.5	48.0	50.4	55.2			
	7.0	34.7	52.4					
	8.0	45.3	65.1					
	8.6	45.3	65.1					
10	45.3							
SPRING No. 394 <b>140-210 mbar</b>  SET TO <b>175 mbar</b>  DROOP <b>26 mbar</b>	210	1.6	2.8	2.9	4.6	5.0	6.6	11.0
	345	2.9	4.8	5.0	8.0	8.7	11.4	19.0
	690	5.0	8.9	11.9	14.1	17.4	23.4	33.6
	1 bar	7.1	10.6	14.2	16.2	20.0	29.7	45.7
	1.5	9.1	13.6	24.1	30.0	36.2	43.0	
	2.0	10.9	15.0	30.2	35.4	40.4	46.7	
	2.5	12.8	20.4	33.8	42.3	46.2	61.2	
	3.0	14.7	23.5	35.1	45.4	50.8		
	4.0	18.3	31.0	38.5				
	6.0	26.5	40.0	42.1				
	7.0	32.6	45.7					
	8.0	39.5	51.7					
	8.6	40.4	52.4					
10	40.4							

**Type of Gases:**  
 The capacities shown in the table are given in terms of natural gas SG 0.6. For all other gases multiply by the following correction factor:

$$\sqrt{\frac{0.6}{\text{SG of gas handled}}}$$


# GAS PRESSURE REGULATOR SERIES 240

## Dimensions & Weights, Sectional Arrangement

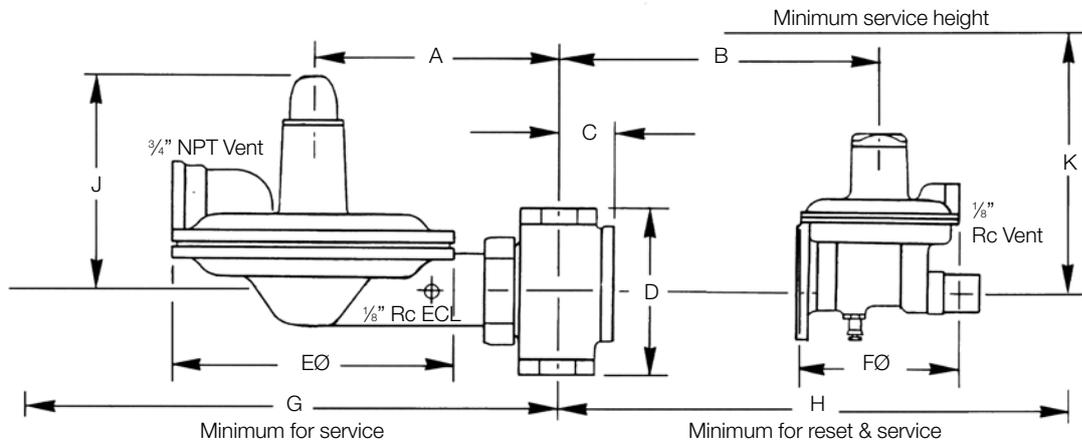

Size & Model	A	B	C	D	E	F	G	H	J	K	WT.Kg
3/4" & 1"	153	-	40	102	172	-	270	-	145	205	2.5
3/4" & 1" c/w S.309LP OPCO	153	100	-	102	172	115	270	230	145	205	3.2
3/4" & 1" Series 240PH	153	-	41	102	172	-	270	-	165	205	3.25

### Sectional Arrangement

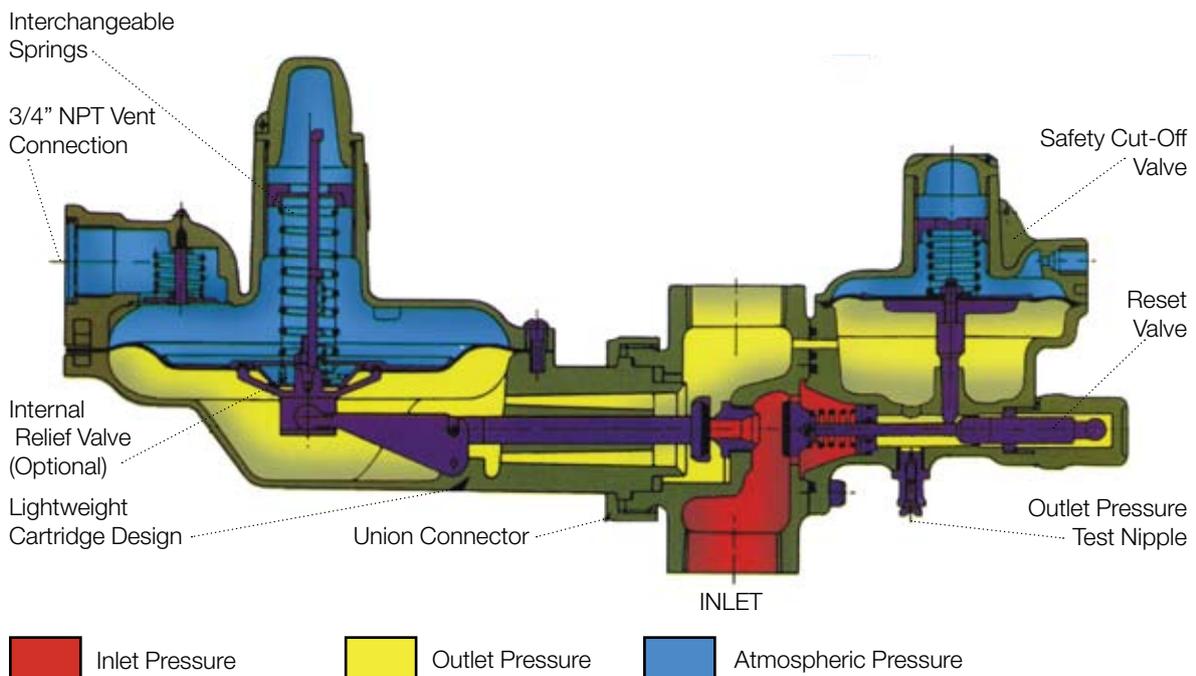



# Honeywell

AUTHORIZED DISTRIBUTOR

**De Gidts & Feldman BV**  
**The Netherlands**  
**w w w . d g f g . n l**



## De Gidts & Feldman

INSTRUMENTATION & FILTRATION

### For More Information

To learn more about RMG's advanced gas solutions, contact your RMG account manager or visit [www.rmg.com](http://www.rmg.com)

### GERMANY

#### Honeywell Process Solutions

RMG Regel + Messtechnik GmbH  
Osterholzstrasse 45  
34123 Kassel, Germany  
Tel: +49 (0)561 5007-0  
Fax: +49 (0)561 5007-107

#### Honeywell Process Solutions

RMG Messtechnik GmbH  
Otto-Hahn-Strasse 5  
35510 Butzbach, Germany  
Tel: +49 (0)6033 897-0  
Fax: +49 (0)6033 897-130

#### Honeywell Process Solutions

RMG Gaselan Regel + Messtechnik GmbH  
Julius-Pintsch-Ring 3  
15517 Fürstenwalde, Germany  
Tel: +49 (0)3361 356-60  
Fax: +49 (0)3361 356-836

#### Honeywell Process Solutions

WÄGA Wärme-Gastechnik GmbH  
Osterholzstrasse 45  
34123 Kassel, Germany  
Tel: +49 (0)561 5007-0  
Fax: +49 (0)561 5007-207

### POLAND

Honeywell Process Solutions  
Gazomet Sp. z o.o.  
ul. Sarnowska 2  
63-900 Rawicz, Poland  
Tel: +48 (0)65 5462401  
Fax: +48 (0)65 5462408

### ENGLAND

#### Honeywell Process Solutions

Bryan Donkin RMG Gas Controls Ltd.  
Enterprise Drive, Holmewood  
Chesterfield S42 5UZ, England  
Tel: +44 (0)1246 501-501  
Fax: +44 (0)1246 501-500

### CANADA

#### Honeywell Process Solutions

Bryan Donkin RMG Canada Ltd.  
50 Clarke Street South, Woodstock  
Ontario N4S 0A8, Canada  
Tel: +1 (0)519 5398531  
Fax: +1 (0)519 5373339

### USA

#### Honeywell Process Solutions

Mercury Instruments LLC  
3940 Virginia Avenue  
Cincinnati, Ohio 45227, USA  
Tel: +1 (0)513 272-1111  
Fax: +1 (0)513 272-0211

### TURKEY

#### Honeywell Process Solutions

RMG GAZ KONT. SIS. ITH. IHR. LTD. STI.  
Birlik Sanayi Sitesi, 6.  
Cd. 62. Sokak No: 7-8-9-10  
TR - Sasmaz / Ankara, Turkey  
Tel: +90 (0)312 27810-80  
Fax: +90 (0)312 27828-23

R.240  
2010-10  
© 2010 Honeywell International Inc.



by Honeywell